

INNOVUS COMPACTS

Standard and Fire Retardant

DESCRIPTION

Innovus decorative Compact laminates according to EN 438 are a robust material for indoor surfaces, either horizontal or vertical. Its double-sided decorative panels meet the most demanding specifications being capable to endure high content of moisture and impact. The product meet the stringent requirements for hygiene, fire resistance, humidity resistance and mechanical properties. The surface of the Compact is antibacterial, validated accordingly to Japanese regulation JIS Z 2801.

The product versions with White and Grey core are fire resistant (B-s2,d0).

Innovus Compact laminates are available in a variety of colours, patterns and surface textures, providing extensive options for architects and designers.

Please check offer & service brochure for information on sizes and thicknesses available.

APPLICATIONS

Innovus Compacts are intended for applications to interior horizontal or vertical surfaces where design, appearance, quality, durability, mechanical resistance and dimensional stability, are important features.

Innovus Compacts are the best choice for wall cladding, partitions, doors, cubicles, lockers, laboratory bench tops and various self-supporting components in construction and transport industries.

RECOMMENDATIONS

The Innovus laminates should be stored so they are protected from moisture, humidity and direct sunlight. The laminates should preferably be store flat in horizontal racks.


The Innovus Compact laminates, with their durable, hygienic and waterproof surface, require no special maintenance. The surface can be cleaned with warm water followed by wiping with a paper towel or soft cloth. Persistent contamination can usually be eliminated with non-abrasive household cleaners. They are resistant to most solvents and chemicals used daily at home.

www.sonaearauco.com

TDS.10.01.SA.R01

Página 1 de 3

PROPERTIES

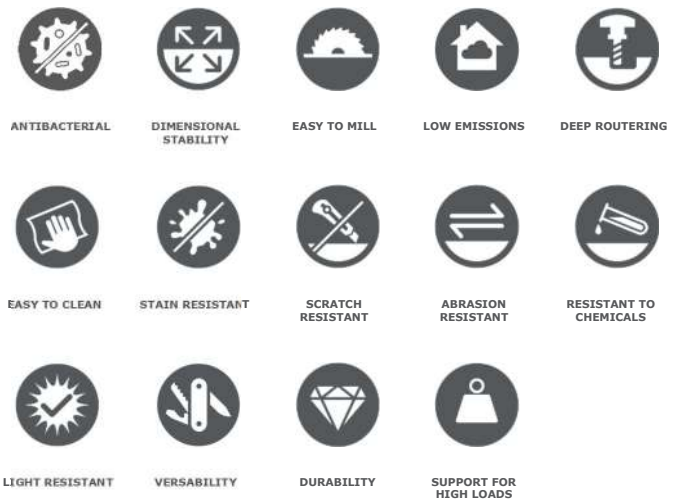

As Compact laminates are classified as non-hazardous, it is not necessary additional product description labels. Is a cured material and is chemically inert. REACH classification does not apply to them.

Innovus Compacts can be brought to controlled waste disposal sites according to current national and/or regional regulations.

INNOVUS COMPACTS

Standard and Fire Retardant

GENERAL FEATURES

PROPERTIES	TEST METHOD	UNIT	CGS	CGF	
Dimensional tolerance requirements	(EN 438-2:2016, Clause No.)	(max or min)			
Thickness	EN 438-2:5	mm (max variation)	2.0 ≤ t < 3.0	± 0.20	
			3.0 ≤ t < 5.0	± 0.30	
			5.0 ≤ t < 8.0	± 0.40	
			8.0 ≤ t < 12.0	± 0.50	
			12.0 ≤ t < 16.0	± 0.60	
			16.0 ≤ t < 20.0	± 0.70	
			20.0 ≤ t ≤ 25.0	± 0.80	
Length and width	EN 438-2:6	mm	+ 10/- 0		
Edges straightness	EN 438-2:7	mm/m (max deviation.)	1.5		
Edges squareness	EN 438-2:8	mm/m (max deviation.)	1.5		
Flatness	EN 438-2:9	mm/m (max deviation.)	2.0 ≤ t < 6.0	8.0 mm /m	
			6.0 ≤ t < 10.0	5.0 mm /m	
			t ≥ 10.0	3.0 mm /m	
General Requirements					
Resistance to surface wear	EN 438-2:10	Revolutions (min.)	Initial Point	150	
Resistance to immersion in boiling water	EN 438-2:12	Appearance, rating (min.)			
		Surface	All finishes	4	
		Edge	All thicknesses	3	
		Mass increase % (max)	2.0 ≤ t < 5.0	5.0	7.0
			t ≥ 5.0	2.0	3.0
Thickness increase % (max)	2.0 ≤ t < 5.0	6.0	9.0		
	t ≥ 5.0	2.0	6.0		
Resistance to water vapour	EN 438-2:14	Appearance, rating (min.)	All finishes	4	
Resistance to dry heat (160 °C)	EN 438-2:16	Appearance, rating (min.)	All finishes	4	
Dimensional stability at elevated temperature	EN 438-2:17	Cumulative dimensional change % (max.)	2.0 ≤ t < 5.0 Longitudinal	0.40	
			2.0 ≤ t < 5.0 Transversal	0.80	
			t ≥ 5.0 Longitudinal	0.30	
			t ≥ 5.0 Transversal	0.60	

INNOVUS COMPACTS

Standard and Fire Retardant

PROPERTIES	TEST METHOD	UNIT (max or min)	CGS	CGF
Resistance to wet heat (100 °C)	EN 438-2:18	Appearance, rating (min.)	All finishes	4
Resistance to impact by large diameter ball	EN 438-2:21	Drop height, mm (min.)	2.0 ≤ t < 6.0	1400
			t ≥ 6.0	1800
Resistance to crazing	EN 438-2:24	Appearance (min.)	Grade	4
Resistance to scratching	EN 438-2:25	Force, rating (min.)	Smooth / textured finishes	2 / 3
Resistance to staining	EN 438-2:26	Appearance, rating (min.)	Groups 1 & 2 / Group 3	5 / 4
Light fastness (xenon arc)	EN 438-2:27	Contrast	Grey scale rating	4 to 5
Flexural Modulus	EN ISO 178	Stress, MPa (min.)	Longitudinal & Transversal	9000
Flexural Strength	EN ISO 178	Stress, MPa (min.)	Longitudinal & Transversal	80
Density	EN ISO 1183-1	Density, g/cm ³ (min.)		1.35

Typical EN 13501-1 classifications of Compacts in the field of building construction

In Europe, laminate panels intended for construction applications are tested in accordance with EN 13823 [1] (SBI test) and EN ISO 11925-2 [2] (Small-burner test), and the resulting reaction-to-fire performance is expressed in accordance with EN 13501-1

CGF ≥ 6mm	B-s1,d0 (required B-s2,d0 or better)
CGF < 6mm	C-s2,d0 or better
CGS	D-s2,d0 or better

Additional requirements for reaction to fire - Type F Compacts

For applications other than construction, test methods and specifications can vary from one country to another. Below some examples of how Compacts typically relate to some of the more common European test methods

Smoke density and toxicity	NF F 16-101	Typical performance level	F2 or better
Railways applications	EN 45545-2	Typical performance level	Depending on the application and on the vehicle category
Transport applications	Directive 95/28/EC	Typical performance level	

Innovus Laminates are classified in accordance with EN 438 – Sheets based on thermosetting resins (Usually called Laminates) – Part 4: Classification and specifications for compact laminates of thickness 2 mm and greater.

LEED™ CREDITS

- The use of Innovus laminates can contribute to the achievement of up to 2 LEED claims.
- The product contains recycled materials and can contribute to obtain LEED credits under MR Credit 4.
- Depending on the location of the construction project, the product can meet the requirements for materials extracted and manufactured regionally and contribute to obtaining LEED credits under MR Credit 5.

CERTIFICATIONS

Please pay attention to certified products:



The mark of responsible forestry
FSC® C013589



Promoting Sustainable Forest Management
PEFC® PEFC/13-32-002 www.pefc.org



FSC® and PEFC™ -certified products are available on request and availability.

www.sonaearauco.com

TDS.10.01.SA.R01

All the product names and company names used in this data sheet are trade names and / or registered trademarks belonging to the respective proprietors. Any reproduction requires the express authorization of Sonae Arauco and /or the respective trademark proprietor. Sonae Arauco assumes no liability for any possible errors in this data sheet. This technical data sheet reflects the current technical specifications at the time of print and will be superseded by any new edition. The Company reserves the right to change specifications at any time without prior notification. Our detailed instructions for use must be observed. The respective building regulations must be complied with. It is important to check the material's suitability for the intended purpose.

SONAE ARAUCO
Taking wood further