


OPTIMUM™

HPL DOORS



LI SURFACES™

CHEMICALLY RESISTANT GROUP 1 FIRE RATED ANTI-STATIC ANTIBACTERIAL

Optimum HPL Internal Doors

INTRODUCING OPTIMUM, OUR NEW RANGE OF INTERNAL HIGH PRESSURE LAMINATES (HPL) FOR DOORS FROM LI SURFACES

CHEMICAL RESISTANT

UV RESISTANT

ANTI-STATIC


GROUP 1 FIRE RATED

**2HR / 4HR HPL FIRE
RETARDANT FOR
FIRE DOORS**



Our OPTIMUM range of High Pressure Laminate (HPL) for doors are available in an array of striking colours and realistic woodgrain finishes. These highly durable laminates for doors can withstand consistent impact and are impervious to other types of damage commonly encountered within more demanding locations.

Due to superior performance qualities, OPTIMUM HPL for doors can be frequently cleaned and maintained, without any risk to the surface finish. Making this range the perfect choice for busy environments, particularly Hotels, Hospitals, Medical Centres, Aged Care Facilities, Schools and Commercial Offices.

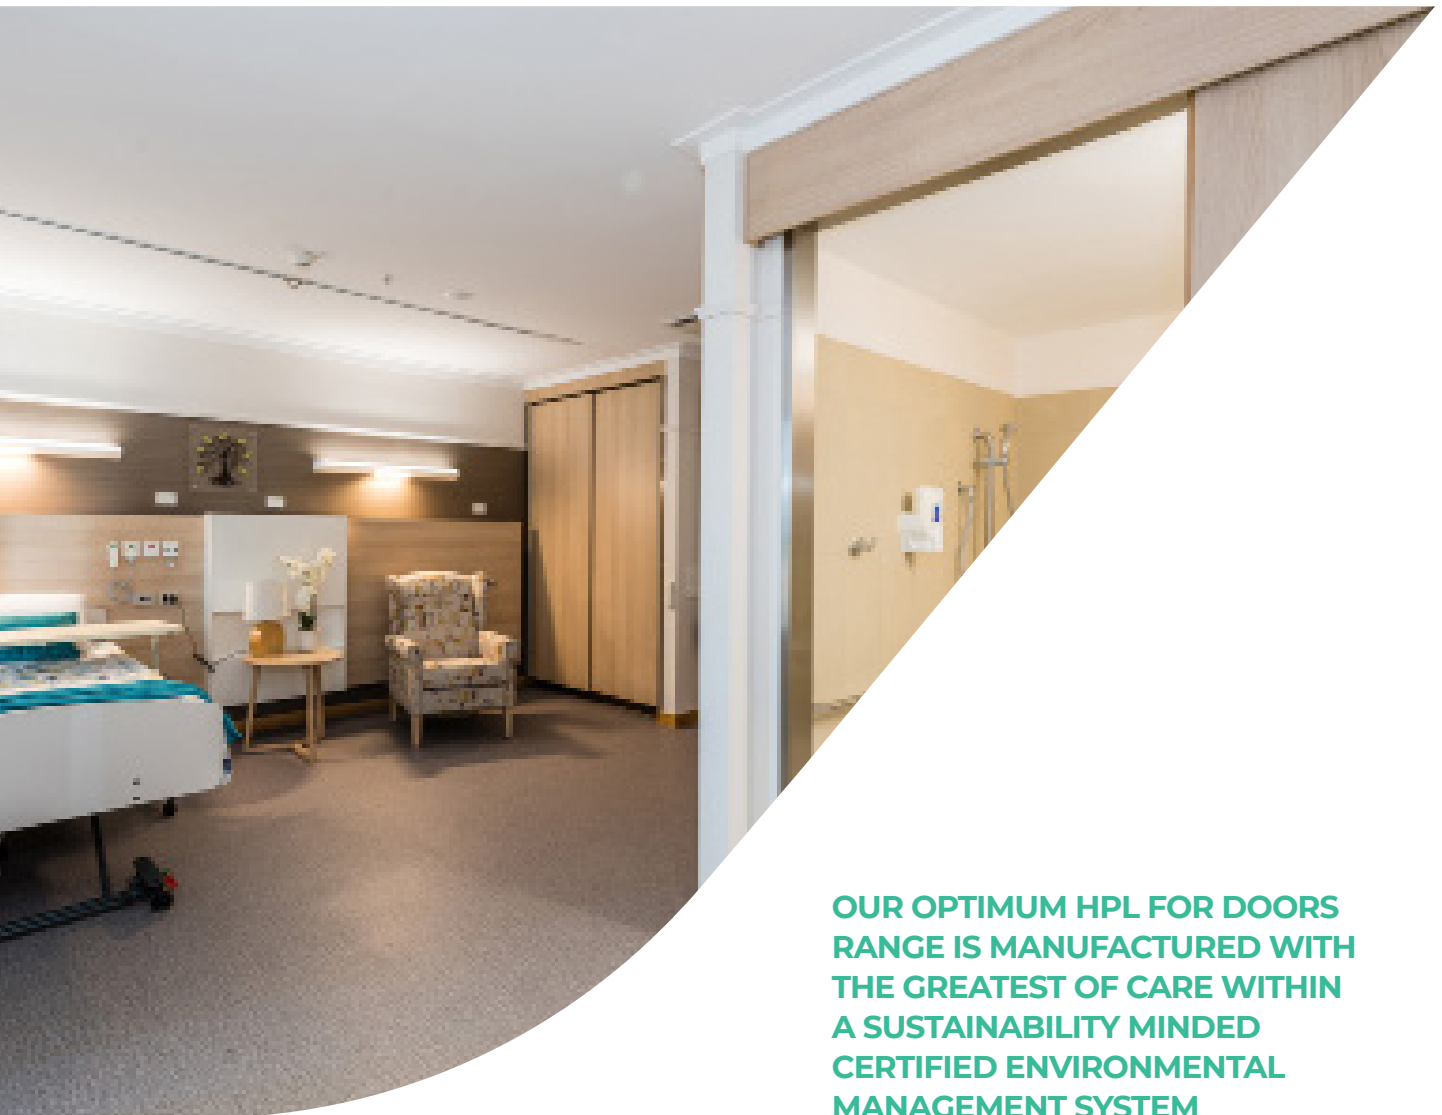

OUR OPTIMUM HPL FOR DOORS RANGE IS MANUFACTURED WITH THE GREATEST OF CARE WITHIN A SUSTAINABILITY MINDED CERTIFIED ENVIRONMENTAL MANAGEMENT SYSTEM

OPTIMUM HPL for doors are all chemical, impact and scratch resistant and available in a variety of door size laminates for best optimization and excellent value. Also suitable for fire door applications, OPTIMUM HPL are available with Group 1 Fire rating certifications available for 1hr, 2hr and 4hr burns.

Design collections

OPTIMUM HPL FOR DOORS BOAST AN EXTENSIVE RANGE OF COLOURS AND TEXTURES ENSURING OPTIMUM DESIGN POSSIBILITIES WITH EXCEPTIONAL REPRODUCTION QUALITIES, ESPECIALLY FOR WOODGRAIN EFFECTS



With more than 300 colour, design and texture decor combinations available in HPL quality at short notice (stock allowing).


This range has the ability to colour match HPL Doors with identical decor Melamine Faced HMR from the extensive wood-based panels range.

Our HPL for Doors available formats:

- 2150 x 915 / 950 / 1050 / 1300 x 0.8 mm
- 2350 x 1050 and 2350 x 1300 x 0.8 mm
- 2800 x 2070 x 0.8 mm (selected decors)
- Individual lengths between 2050 - 5300 mm *
- Other thickness (including 2.0 mm) *

* Available on request

Certifications

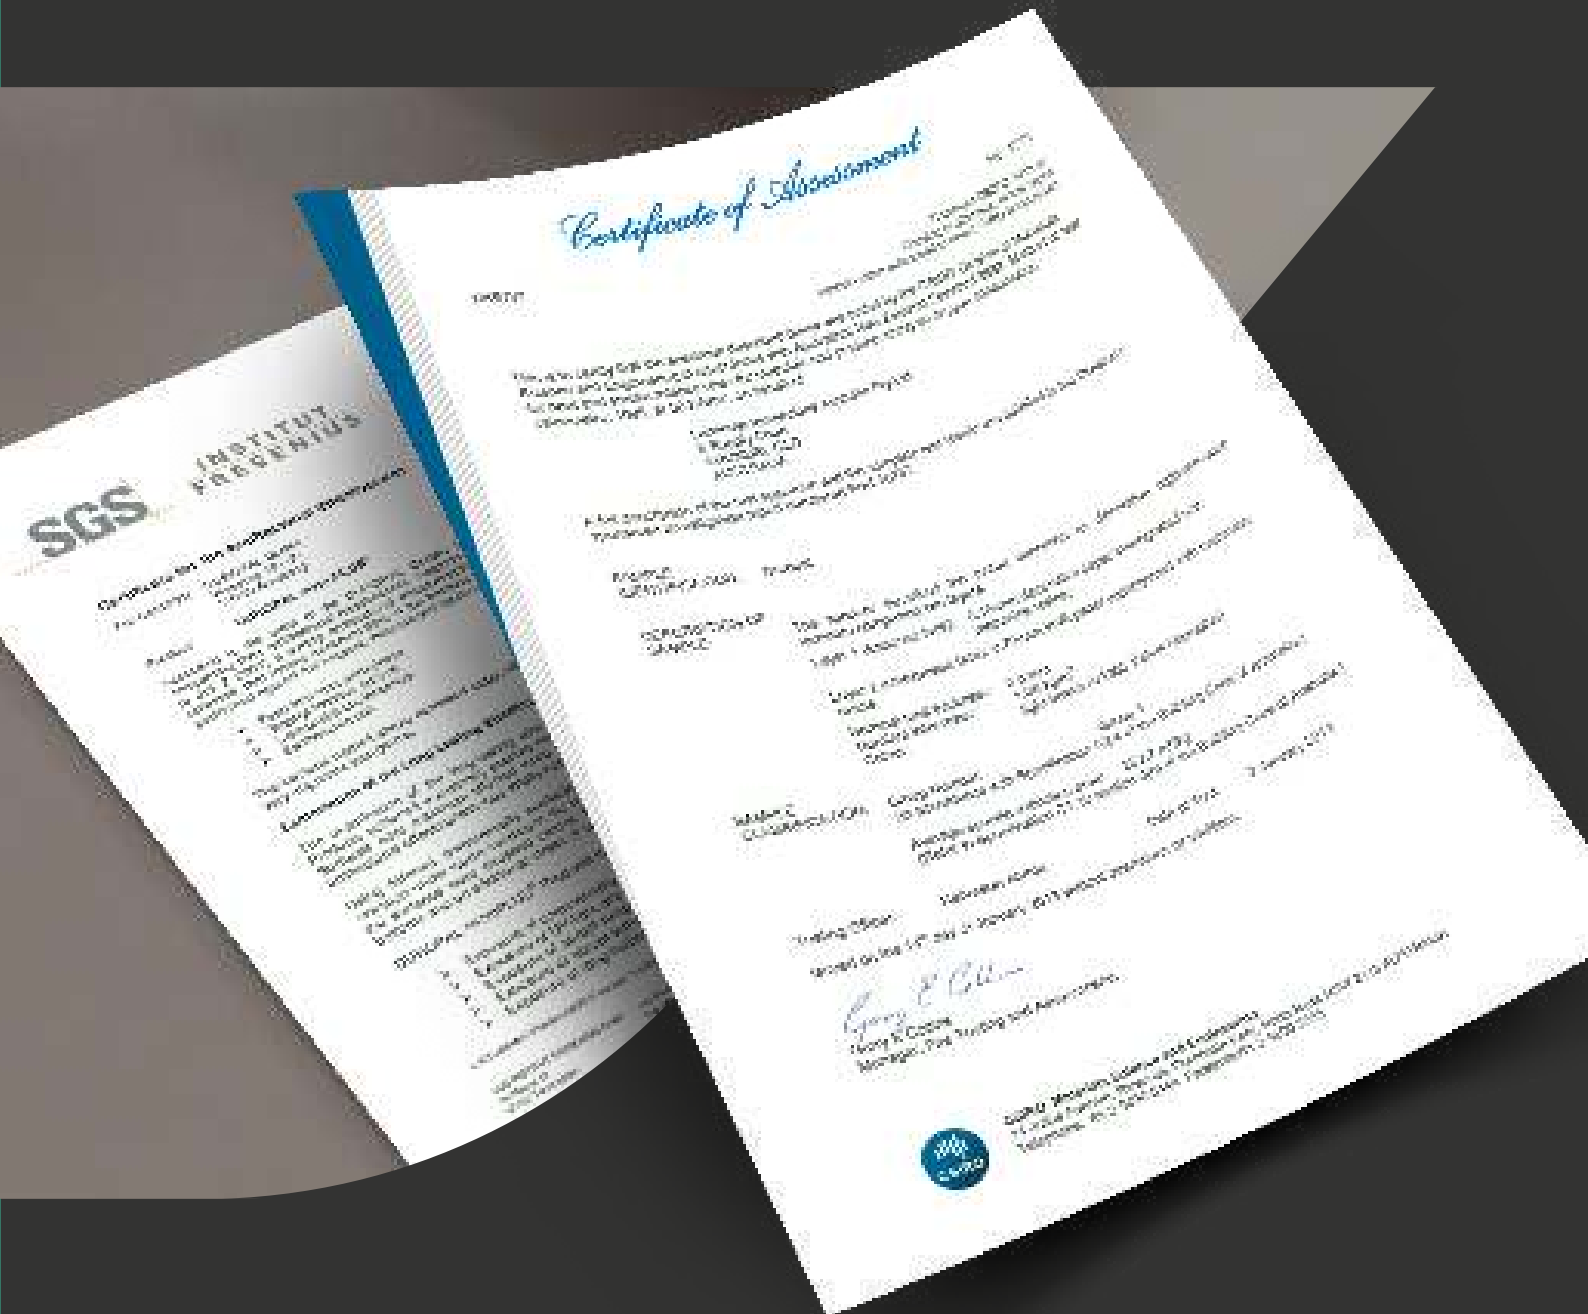

Our premium products are fully certified to Australian and European standards. Visit our website or contact your local Specifications Specialist for all information covering warranties, environmental, health and safety, fire rating and chemical resistance certifications.

lisurfaces.com.au/resources/



ANTIBACTERIAL



CHEMICAL RESISTANT



ANTI-STATIC



FIRE RETARDANT



GROUP 1 FIRE RATED



LI SURFACES™

OPTIMUM™
HPL DOORS

Variety for creativity
European quality for
your projects

DELIVERING EUROPEAN QUALITY

LAMICOLOR®

innovus®

CLEAF

DUROPAL



Any questions?
We look forward to hearing from you

© 2019

All information is correct at time of production
Some product colour differences may appear
due to printing or screen variances

1300 600 009
lisurfaces.com.au

5 Supply Court
Arundel Queensland 4214



Our products timbers
are sourced from
certified sustainable
forest management